

IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation.
- Fixture rated up to 40 Watt MAX Type A INCANDESCENT bulbs (NOT included). LED bulbs may be used.
- Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

WARNING:

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.

PRODUCTS ARE NOT INTENDED FOR COMMERCIAL USE.


MADE IN INDIA

Page 1 of 3

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.

NOTE: To avoid accidentally discarding small parts or hardware, retain all carton contents until assembly and installation are complete.

Hardware
Located Here




Recommended Location for Use: Dry Indoor Environment

Assembly Time: 25 Minutes

People Required: 2

Tools Required: Screwdriver, Wire Strippers, Wire Cutters, Electrical Tape, Pliers

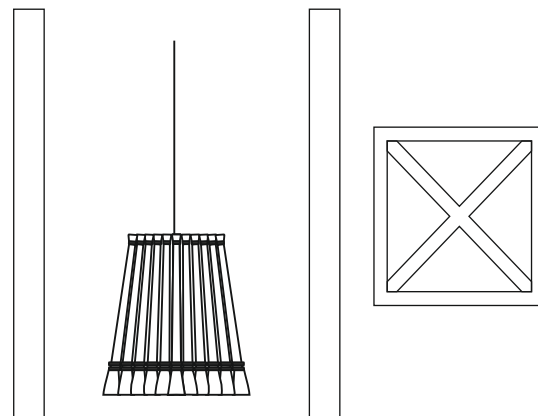

PARTS

Check to make sure you have the following:


INCLUDED:



1 - Fixture Body (A)




2 - Mounting Screws (D)




Canopy Screw (E)



1 - Canopy (B)



2 - Wire Connectors (F)



1 - Mounting Bracket (C)

NOT INCLUDED:





1- 40 Watt Max
INCANDESCENT Type A
*LED bulbs may be used.



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 1: ADD CANOPY (B)

Determine drop measurement to achieve your drop requirement. (this fixture comes with 8 feet wire prefixed with fixture body) then secure with safety clip fixed under canopy (B) as shown in the picture below.

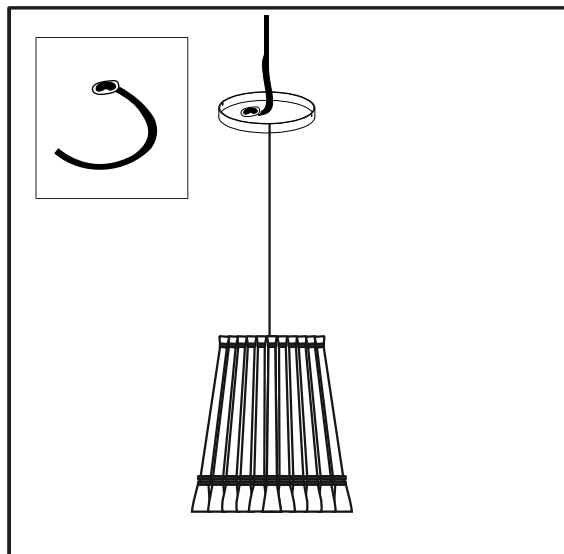


STEP 2: CONNECT ELECTRICAL

Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (F). Wrap both around green ground screw on Mounting Bracket (C) and firmly tighten.

⚡ TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY: Connect wires BLACK (or smooth) to *BLACK. Connect wires WHITE (or ribbed along the edge) to WHITE. Firmly secure with Wire Connectors. SEE INSERT BELOW :

* Black wire may be red in some installations.

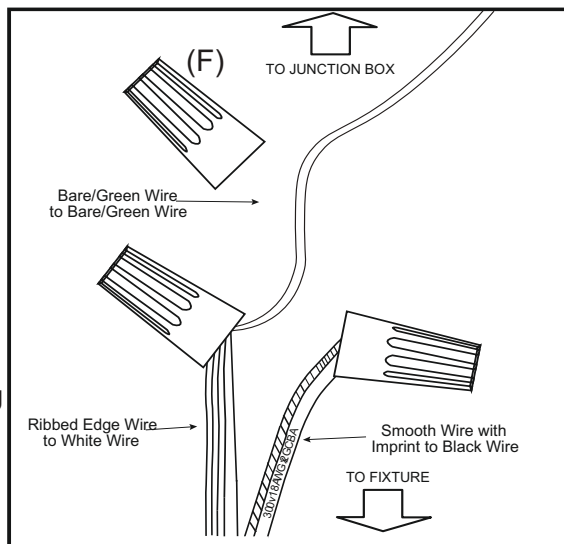


STEP 3: ATTACH MOUNTING BRACKET (C) TO JUNCTION BOX.

STEP 4: ATTACH FIXTURE TO JUNCTION BOX.

This step may require a second person. Carefully lift assemble Fixture to Junction Box and securely attach Mounting Bracket (C) to Fixture Canopy with Canopy Screw (E) ASSEMBLY COMPLETED.

CAUTION: INSPECT WIRES EXITING NIPPLE TO ENSURE THEY ARE NOT PINCHED AT TOP INSIDE JUNCTION BOX AND BRACKET IS TIGHTENED.

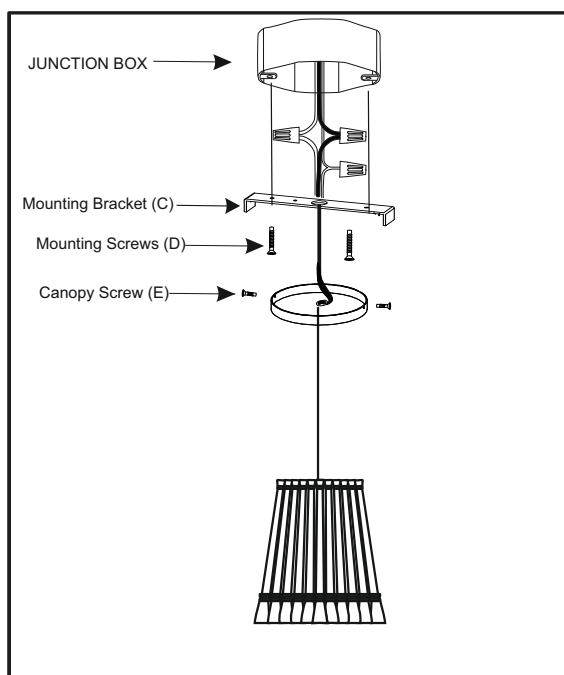

	<p>Cleaning and Care</p> <p>Periodically wipe Fixture with a soft, dry cloth. Avoid harsh or abrasive chemicals as finish damage may result.</p>
--	---